



THE NETHERLANDS

COMMUNICATION

Concerning ⁽¹⁾:

- ~~approval granted~~
- ~~approval extended~~
- ~~approval refused~~
- ~~approval withdrawn~~
- ~~production definitively discontinued~~

of a type of CNG/LNG component pursuant to Regulation number 110.

Approval number: E4*110R05/00*0519*021. ~~CNG/LNG~~ component considered:

- ~~Container(s) or cylinder(s)~~⁽⁴⁾
- ~~Tank(s) or vessel(s)~~⁽⁴⁾
- ~~CNG accumulator(s)~~⁽⁴⁾
- ~~Pressure indicator~~⁽⁴⁾
- ~~Pressure relief valve~~⁽⁴⁾
- ~~Automatic valve(s)~~⁽⁴⁾
- ~~Excess flow valve~~⁽⁴⁾
- ~~Gas-tight housing~~⁽⁴⁾
- ~~Pressure regulator(s)~~⁽⁴⁾
- ~~Non-return valve(s) or check valve(s)~~⁽⁴⁾
- ~~Pressure relief device (PRD)(temperature triggered)~~⁽⁴⁾
- ~~Manual valve~~⁽⁴⁾
- ~~Flexible fuel lines~~⁽⁴⁾
- ~~Filling unit or receptacle~~⁽⁴⁾
- ~~Gas injector(s)~~⁽⁴⁾
- ~~CNG Compressor~~⁽⁴⁾
- ~~Gas flow adjuster~~⁽⁴⁾
- ~~Gas/air mixer~~⁽⁴⁾
- ~~Electronic control unit~~⁽⁴⁾
- ~~Pressure and temperature sensor(s)~~⁽⁴⁾
- ~~CNG filter(s)~~⁽⁴⁾
- ~~PRD (pressure triggered)~~⁽⁴⁾
- ~~Fuel rail~~⁽⁴⁾
- ~~Heat exchanger(s)/vaporizer(s)~~⁽⁴⁾



- ~~Natural gas detector(s)~~⁽¹⁾
 - ~~LNG filling receptacle(s)~~⁽¹⁾
 - LNG pressure control regulator(s)⁽¹⁾
 - ~~LNG pressure and/or temperature sensor(s)~~⁽¹⁾
 - ~~LNG manual valve(s)~~⁽¹⁾
 - ~~LNG automatic valve(s)~~⁽¹⁾
 - ~~LNG non return valve(s)~~⁽¹⁾
 - ~~LNG pressure relief valve(s)~~⁽¹⁾
 - ~~LNG excess flow valve(s)~~⁽¹⁾
 - ~~LNG fuel pump(s)~~⁽¹⁾
2. Trade name or mark : LNG Pressure control regulator RG500C series
3. Manufacturer's name and address : Engineered Controls International LLC
100 RegO Drive 27244
Elon, North Carolina
United States of America
4. If applicable, name and address of manufacturer's representative : N.A.
5. Submitted for approval on : April 2019
6. Technical service responsible for conducting approval tests : Kiwa Nederland B.V.
P.O. Box 137
7300 AC Apeldoorn
The Netherlands
7. Date of report issued by that service : 06-03-2023
8. Number of report issued by that service : 190200994_P000304132
9. Approval : ~~granted/refused/extended/withdrawn~~⁽¹⁾
10. Reason(s) of extension (if applicable) : The currently homologated LNG Pressure control regulator RG500C series is updated to the latest Revision of the ECE Regulation 110
11. Place : Zoetermeer
12. Date : 21 March 2023
13. Signature : 
 R.F.R. Clement
14. The documents filed with the application or extension of approval can be obtained upon request.

⁽¹⁾ Strike out what does not apply.

ADDENDUM

1. Additional information concerning the type approval of a type of ~~CNG~~/LNG components pursuant to Regulation number 110.
 - 1.1. Natural Gas Storage System
 - 1.1.1. Container(s) or cylinder(s) (for CNG system)
 - 1.1.1.1. Dimensions :
 - 1.1.1.2. Material :
 - 1.1.2. Tank(s) or vessel(s) (for LNG system)
 - 1.1.2.1. Capacity :
 - 1.1.2.2. Material :
 - 1.1.3. CNG accumulator
 - 1.1.3.1. Dimensions :
 - 1.1.3.2. Material :
 - 1.1.3.3. Capacity :
 - 1.2. Pressure indicator
 - 1.2.1. Working pressure(s) ⁽²⁾ :
 - 1.2.2. Material :
 - 1.3. Pressure relief valve (discharge valve)
 - 1.3.1. Working pressure(s) ⁽²⁾ :
 - 1.3.2. Material :
 - 1.4. Automatic valve(s)
 - 1.4.1. Working pressure(s) ⁽²⁾ :
 - 1.4.2. Material :
 - 1.5. Excess flow valve
 - 1.5.1. Working pressure(s) ⁽²⁾ :
 - 1.5.2. Material :
 - 1.6. Gas-tight housing
 - 1.6.1. Working pressure(s) ⁽²⁾ :
 - 1.6.2. Material :
 - 1.7. Pressure regulator(s)
 - 1.7.1. Working pressure(s) ⁽²⁾ :
 - 1.7.2. Material :
 - 1.8. Non-return valve(s) or check valve(s)
 - 1.8.1. Working pressure(s) ⁽²⁾ :
 - 1.8.2. Material :
 - 1.9. Pressure relief device (temperature triggered)
 - 1.9.1. Working pressure(s) ⁽²⁾ :
 - 1.9.2. Material :



1.10.	Manual valve	
1.10.1.	Working pressure(s) ⁽²⁾	:
1.10.2.	Material	:
1.11.	Flexible fuel lines	
1.11.1.	Working pressure(s) ⁽²⁾	:
1.11.2.	Material	:
1.12.	Filling unit or receptacle	
1.12.1.	Working pressure(s) ⁽²⁾	:
1.12.2.	Material	:
1.13.	Gas injector(s)	
1.13.1.	Working pressure(s) ⁽²⁾	:
1.13.2.	Material	:
1.14.	Gas flow adjuster	
1.14.1.	Working pressure(s) ⁽²⁾	:
1.14.2.	Material	:
1.15.	Gas/air mixer	
1.15.1.	Working pressure(s) ⁽²⁾	:
1.15.2.	Material	:
1.16.	Electronic control unit	
1.16.1.	Basic software principles	:
1.17.	Pressure and temperature sensor(s)	
1.17.1.	Working pressure(s) ⁽²⁾	:
1.17.2.	Material	:
1.18.	CNG filter(s)	
1.18.1.	Working pressure(s) ⁽²⁾	:
1.18.2.	Material	:
1.19.	PRD (pressure triggered)	
1.19.1.	Working pressure(s) ⁽²⁾	:
1.19.2.	Material	:
1.20.	Fuel rail(s)	
1.20.1.	Working pressure(s) ⁽²⁾	:
1.20.2.	Material	:
1.21.	Heat Exchanger(s)/Vaporizer(s)	
1.21.1.	Working pressure(s) ⁽²⁾	:
1.21.2.	Material	:
1.22.	Natural gas detector(s)	
1.22.1.	Working pressure(s) ⁽²⁾	:
1.22.2.	Material	:



1.23.	LNG filling receptacle(s)	
1.23.1.	Working pressure(s) ⁽²⁾	:
1.23.2.	Material	:
1.24.	LNG pressure control regulator(s)	
1.24.1.	Working pressure(s) ⁽²⁾	: 3.79 MPa (37.9 bar / 550 psi)
1.24.2.	Material	: See test report 190200994_P000304132
1.25.	LNG pressure and/or temperature sensor(s)	
1.25.1.	Working pressure(s) ⁽²⁾	:
1.25.2.	Material	:
1.26.	LNG manual valve(s)	
1.26.1.	Working pressure(s) ⁽²⁾	:
1.26.2.	Material	:
1.27.	LNG automatic valve(s)	
1.27.1.	Working pressure(s) ⁽²⁾	:
1.27.2.	Material	:
1.28.	LNG non-return valve(s)	
1.28.1.	Working pressure(s) ⁽²⁾	:
1.28.2.	Material	:
1.29.	LNG pressure relief valve(s)	
1.29.1.	Working pressure(s) ⁽²⁾	:
1.29.2.	Material	:
1.30.	LNG excess flow valve(s)	
1.30.1.	Working pressure(s) ⁽²⁾	:
1.30.2.	Material	:
1.31.	LNG fuel pump(s)	
1.31.1.	Working pressure(s) ⁽²⁾	:
1.31.2.	Material	:
1.32.	CNG Compressor	
1.32.1.	Working pressure(s) ⁽²⁾	:
1.32.2.	Material	:

⁽²⁾ Specify the tolerance.



Report 190200994_P000304132
06-03-2023

Test report

LNG Pressure control regulator RG500C series



Applicant

Engineered Controls International, LLC
100 RegO Drive 27244
Elon, North Carolina
United States of America

**Trust
Quality
Progress**

Contents

1	Summary of testing.....	5
2	Description of the product.....	6
3	Report history	7
4	Measurement uncertainty	8
5	Appendices	9
6	End of report	13

© 2023, Kiwa Nederland B.V.

This report may only be duplicated as a complete set without any modifications and with permission of the legitimate owner. The test results in this report are exclusively related to the samples offered and tested.

Tests marked in this report with the IRN number are part of the accreditation scope (RvA L248) unless stated differently.

Measurement uncertainty of testing in the context of ISO/IEC 17025.

Test reports can, in some cases, contain besides the numeric measured values also the qualification "pass" or "fail". In this assessment, compliance with the specification limit from the applicable product standard is used. The measurement complies with the requirement if the probability of its being within the limit is at least 50%.

This does not take into account the measurement uncertainty associated with the test method.

It is explicitly stated that in the case of a "pass" or "fail", the measured result is corrected for the measurement uncertainty and/or the relevant test conditions for the measured result.

Unless otherwise noted the measurement uncertainty and conditions are as specified in the test specifications.

This report is only valid when signed by the test person and reviewer.

- RDW designation number for E4 and e4: RDWT-CAC-04
- KBA designation number for E1 and e1: KBA-P00033-12

Conclusions for compliance with e.g. product standard requirements are not part of the lab scope (RvA L248).

In case when information is supplied by the customer it is possible that it can affect the validity of results.

In case of dispute regarding this test report please contact Kiwa Nederland B.V.

Version: 004

TEST REPORT
LNG Pressure control regulator RG500C series

In accordance with ECE R110

Report number	:	190200994	
Job reference	:	P000304132	
Date of issue	:	06-03-2023	
Total number of pages	:	13 (including appendices)	
Testing laboratory	:	KIWA Nederland B.V.	
Testing location/address	:	Wilmersdorf 50 7327 AC Apeldoorn The Netherlands	
Applicant's name	:	Engineered Controls International, LLC	
Address	:	100 RegO Drive 27244 Elon, North Carolina United States of America	
Manufacturers location	:	Shanghai RegO Flow Technology Co Ltd	
Address	:	34 th Building, No 6999, Chuansha Rd Smart International Park Pudong, Shanghai China	
Scope	:	Testing of LNG Pressure control regulator RG500C series regarding the requirements as derived from the below mentioned Test specifications.	
Test specifications	:	Regulation 110 Addendum 109: Regulation No. 110 Revision 6 - Amendment 4 05 series of amendments– Date of entry into force: 22 June 2022	
Standards	:		
Non-standard test method	:	N.A.	
Component description	:	LNG Pressure control regulator RG500C series	
Manufacturer	:	Engineered Controls International, LLC	
Trade Mark	:	RegO Products	
Model/Type reference	:	LNG Pressure controls regulator GR500C series (a full overview can be found in chapter 2: Description of the product)	

Sample number(s) : N.A.
Intake date sample(s) : N.A.
Date(s) of testing : N.A.

Remarks : N.A.

Summary : Complies with the requirements as far as identified in the attached test- and result sheets.

Tested by : Regina Adelmann
(name + signature)

A handwritten signature in purple ink, appearing to read "Regina Adelmann".

Reviewed by : Eric Harmsen
(name + signature)

A handwritten signature in black ink, appearing to read "Eric Harmsen".

1 Summary of testing

On request of Engineered Controls International, LLC the items as mentioned under Test item description are tested according to the Test specifications (see page 3 of this report).

Based on the product(s) information the test plan is not subject to any special interpretations or modifications.

The following modifications are made to the LNG Pressure control regulator RG500C series

- The currently homologated LNG Pressure control regulator RG500C series is updated to the latest Revision of the ECE Regulation 110

As a result, no tests are carried out

Notes

- The described test results are only valid for the tested materials and objects.
- RDW designation number for E4 and e4: RDWT-CAC-04
- KBA designation number for E1 and e1: KBA-P00033-12

2 Description of the product

The information below is based on the test results on the models under testing and the information of the manufacturer.

LNG Pressure control regulator RG500C series

Approval number(s)	:	E4*110R05/00*0519*02
Marking number(s)	:	E4-110R-050519 "L"
Manufacturer	:	Engineered Controls International, LLC
Brand name(s)	:	RegO
Type(s)	:	RG503C-125 RG503C-175 RG502C-125 RG502-125 RG502C-175 RG502-175 RG502C-325 RG502-325
Working pressure	:	550 psi (37.9 bar)
Set pressure	:	RG503C-125 – 125 psi (8.62 bar) RG503C-175 – 175 psi (12.07 bar) RG502(C)-125 – 125 psi (8.62 bar) RG502(C)-175 – 175 psi (12.07 bar) RG502(C)-325 – 325 psi (22.4 bar)
Classification	:	Class 5
Temperature range	:	-162°C up to 85°C
Material(s)	:	see drawing

3 Report history

Report number : **190200994**
Project number : **190200994**
Approval number : E4*110R03/00*0519*00
Marking number : E4-110R-030519
Report date : 12-04-2019
Author : Henry Rooks
Description : Initial report
LNG Pressure control regulator RG500C series

Report number : **190200994**
Project number : **P000131931**
Approval number : E4*110R04/02*0519*01
Marking number : E4-110R-040519 "L"
Report date : 24-10-2022
Author : Regina Adelmann
Description : Extension 01
The following modifications are included:
- Addition of new model RG502
- Expanding pressure range to 325 psi (22.4 bar)
- Expanding working pressure to 550 psi (37.9 bar)
- The currently homologated LNG Pressure control regulator RG500C series is updated to the latest Supplement version of the ECE Regulation 110

Report number : **190200994**
Project number : **P000304132**
Approval number : E4*110R05/00*0519*02
Marking number : E4-110R-050519 "L"
Report date : 06-03-2023
Author : Regina Adelmann
Description : Extension 02

The following modifications are included:

The currently homologated LNG Pressure control regulator RG500C series is updated to the latest Revision of the ECE Regulation 110.

4 Measurement uncertainty

Measurement uncertainty of testing in the context of ISO/IEC 17025

Applied equipment

The applied equipment in the department Automotive are in the calibration database ICS2000, in this database the equipment of the department is stated with the applicable measurement uncertainty. This database is controlled by the calibration department.

Applied measurement uncertainty

In the laboratory the OM 3.10.7 applies.


Unless otherwise specified in the test specifications the measurement uncertainty and conditions applied are:

Voltage	$\pm 2 \% \text{ Reading}$
High voltage test device (SPS) 500 – 3750 Vac	$\pm 5 \% \text{ Reading}$
Resistance	$\pm 2 \% \text{ Reading}$
Protective wire and insulation test device	$\pm 5 \% \text{ Reading}$
Sliding gauge	$\pm 0.1 \text{ mm}$
Measuring tape	$\pm 1 \text{ mm}$
Cooling and heating $< -10 \text{ }^{\circ}\text{C}$	$\pm 5 \text{ }^{\circ}\text{C}$
Cooling and heating $-10 \text{ }^{\circ}\text{C} / +100 \text{ }^{\circ}\text{C}$	$\pm 3 \text{ }^{\circ}\text{C}$
Cooling and heating $> 100 \text{ }^{\circ}\text{C}$	$\pm 5 \% \text{ Reading}$
Climate chamber	$\pm 2 \text{ }^{\circ}\text{C} / \pm 3 \% \text{RV}$
Ambient temperature	$\pm 1 \text{ }^{\circ}\text{C} (10-30)$
Time $\leq 1 \text{ hour}$	$\pm 0.2 \text{ s}$
Time $> 1 \text{ hour}$	$\pm 0.1 \% \text{ Reading}$
Torque	$\pm 5 \% \text{ Reading}$
Bending moment	$\pm 5 \% \text{ Reading}$
Standard weight	$\pm 5 \% \text{ Reading}$
Weighing $< 30 \text{ g}$	$\pm 0.1 \% \text{ Reading}$
Weighing $> 30 \text{ g}$	$\pm 2 \% \text{ Reading}$
Pressure (gas + air) general	$\pm 5 \% \text{ Reading}$
Barometer reading	$\pm 5 \text{ mbar}$
Pressure (water)	$\pm 5 \% \text{ Reading}$
Burst water pressure	$\pm 1 \% \text{ Reading}$
Gas tightness $0-100 \text{ cm}^3/\text{h}$	$\pm 5 \text{ cm}^3/\text{h}$
Gas tightness $> 100 \text{ cm}^3/\text{h}$	$\pm 5 \% \text{ Reading}$
Actual Flow rate (general)	$\pm 5 \% \text{ Reading}$

5 Appendices

Appendix 1 – Drawings	10
-----------------------------	----

Appendix 1 – Drawings

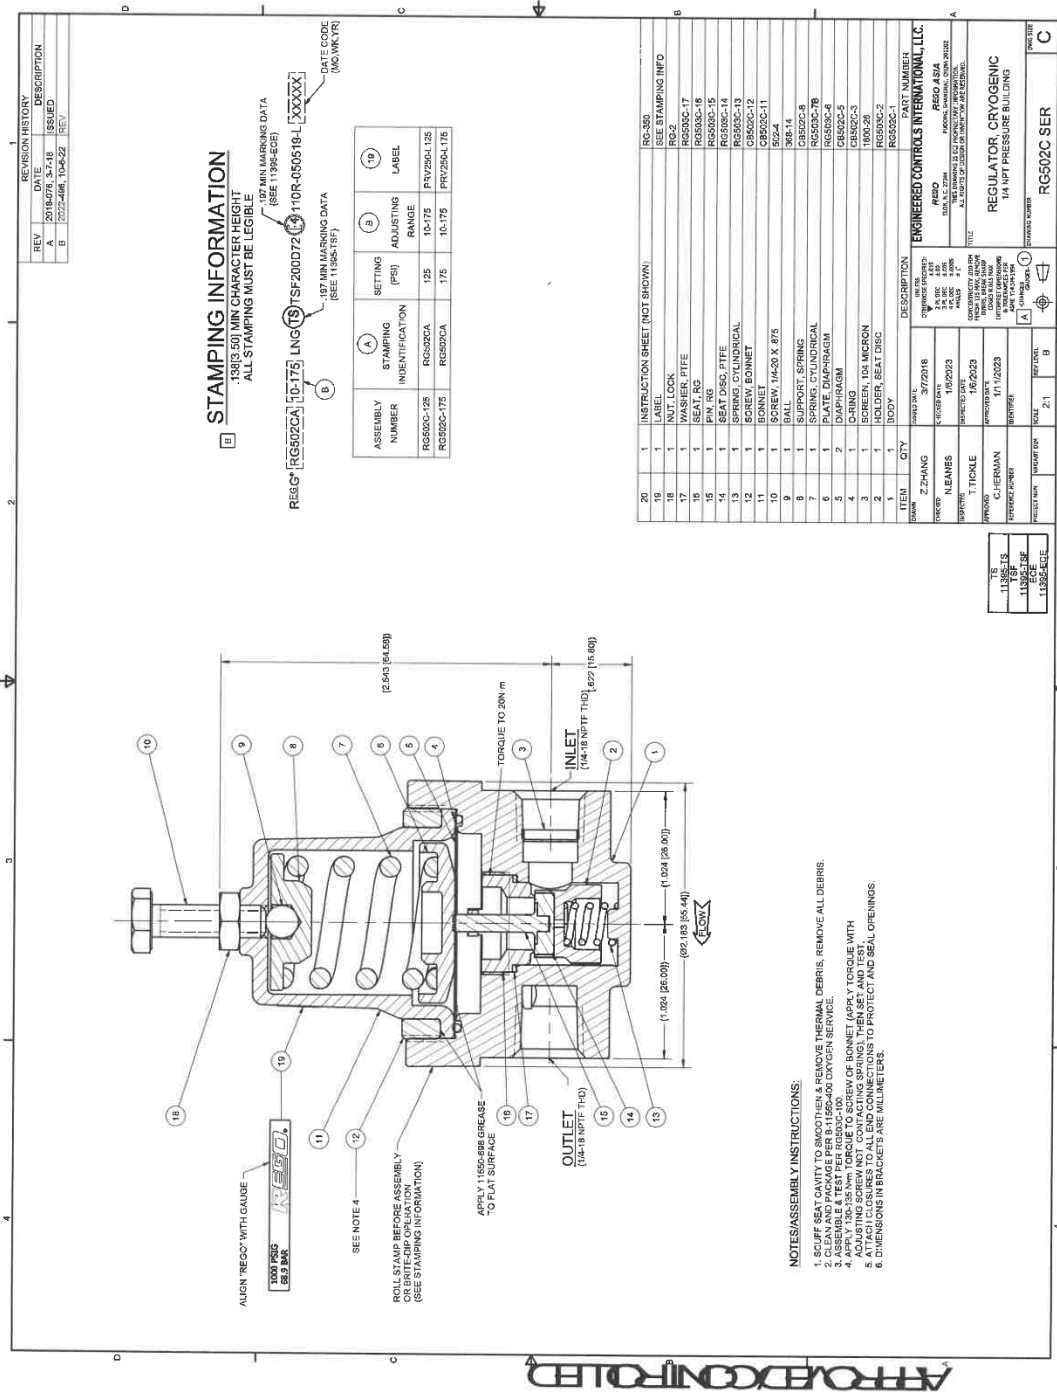

6 End of report