


# Needle Valves 1224, 1316 and 1318

## Application

These valves are high quality, "true" throttling valves. Unlike most so-called needle valves, both the body seat and stem are tapered to provide fine, precise control over a wide range of adjustment without stem galling.

The 1224 may be used as a small, inexpensive shut-off valve between a pressure gauge and bulk storage container to allow for convenient gauge replacement.

The 1316 and 1318 provide taper pipe thread by left hand hose connection threads and are useful in a wide range of torch and fuel burner applications where an accurate throttling action is required.

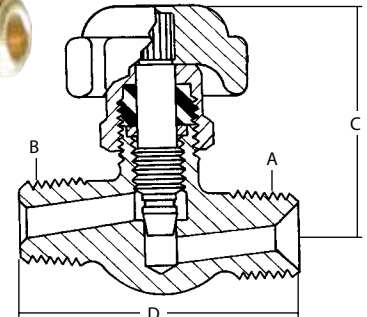

## Ordering Information

Part Number	A. Inlet Connection	B. Outlet Connection	C. Height	D. Length
<a href="#">1224WA</a>	1/4" M. NPT	1/4" M. NPT	1 9/16"	1 3/4"
<a href="#">1316WA</a>	9/16" - 18 L.H.	1/8" M. NPT		
<a href="#">1318WA</a>		1/4" M. NPT		