

Heavy Duty Gas Line Regulator

1780 Series

Application

The 1780 Series Regulators are designed for final line pressure regulation on gas distribution systems. They are suitable for a variety of gases in medical or industrial applications. The 1780 Series Regulators have a balanced seat, are constructed with oxygen compatible materials, and have the same valve design, brass body, and internal parts as the premium BR-1780 Series. Flow performance is likewise equal to the BR-1780 Series.

Features

- Maintains a steady downstream pressure across a range of inlet pressure commonly provided by a cryogenic bulk tank.
- Large seat and diaphragm areas provide high capacity with sensitive control of delivery pressure with low falloff.
- Two 1/4" FNPT delivery pressure gauge ports are located (plugged) on each side of the valve.
- Two bonnet drain/vent holes to allow for different mounting orientation.
- T-handle adjusting screw.
- Maximum inlet pressure is 400 psig.
- Available in three delivery pressure ranges.
- Temperature range: -40 F to 165 F.
- Cleaned per CGA G-4.1 for oxygen service.

Materials

- Body.....Forged Brass
- Bonnet.....Nickel Plated Aluminum
- Diaphragm.....Nitrile with PTFE liner
- Springs and fasteners.....Stainless Steel
- Other valve parts.....Brass
- Seat Disc & O-Rings.....Viton is standard

For Carbon Dioxide or Nitrous Oxide service: Specify EPDM material for seat disc and O-rings, add "E" to end of part number.


Dimensions

The 1780 Series Regulators have inlet and outlet connection dimensions similar to the popular 1680 Series aluminum regulators. This means that you can replace the respective size 1680 Series regulator with the new 1780 Series regulator and have the improved balanced seat performance.

Ordering Information

Part Number	Delivery Pressure Range	Pressure Gauge* Range (PSI)	P/N	Inlet & Outlet (F.N.P.T.)	Dimensions				Cv
					"A"	"B"	"C"	"D"	
1784A	5-55 psig	1-100	1286	1/2"	2.82"	3.62"	1.38"	5.47"	3.1
1784B	40-110 psig	1-200	S1679	1/2"	2.82"	3.62"	1.38"	5.47"	3.1
1784C	100-200 psig	1-400	15578	1/2"	2.82"	3.62"	1.38"	5.47"	3.1
1786A	5-55 psig	1-100	1286	3/4"	3.31"	4.69"	1.60"	6.84"	4.8
1786B	40-110 psig	1-200	S1679	3/4"	3.31"	4.69"	1.60"	6.84"	4.8
1786C	100-200 psig	1-400	15578	3/4"	3.31"	4.69"	1.60"	6.84"	4.8
1788A	5-55 psig	1-100	1286	1"	3.31"	4.69"	1.60"	6.84"	5.5
1788B	40-110 psig	1-200	S1679	1"	3.31"	4.69"	1.60"	6.84"	5.5
1788C	100-200 psig	1-400	15578	1"	3.31"	4.69"	1.60"	6.84"	5.5



* Regulator sold without gauge. Order gauge separately.

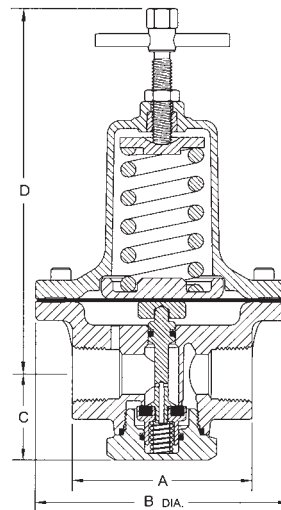



Heavy Duty Line Regulators Performance Curves

1780 Series BR-1780 Series



“A” spring range 5 - 55 psig

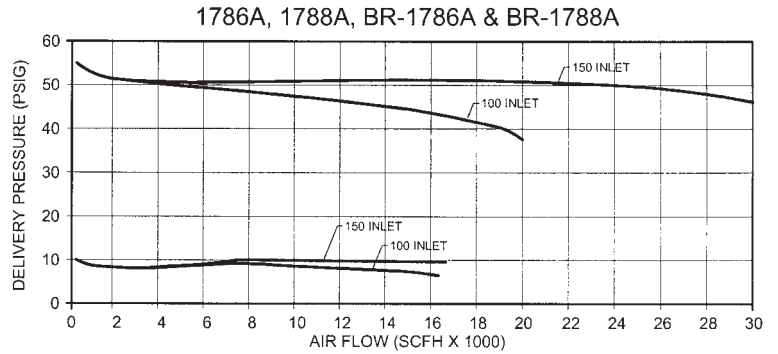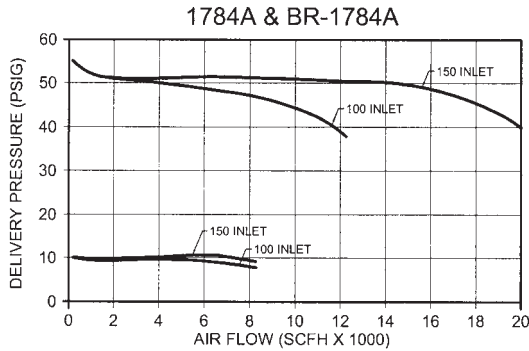

“B” spring range 40 - 110 psig

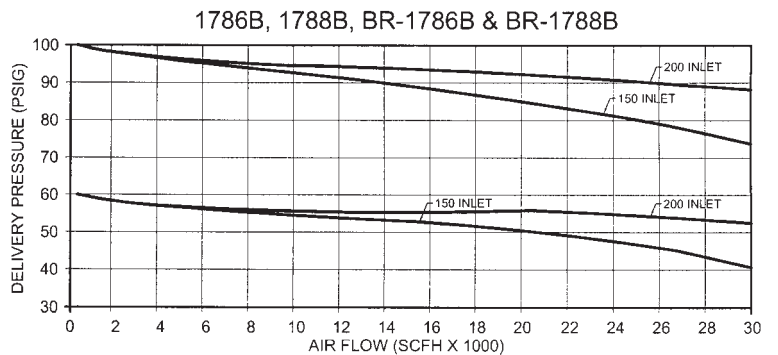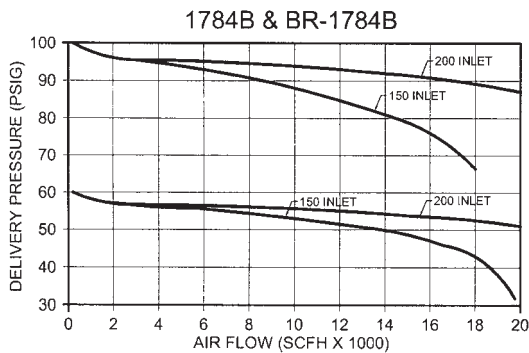

“C” spring range 100 - 200 psig

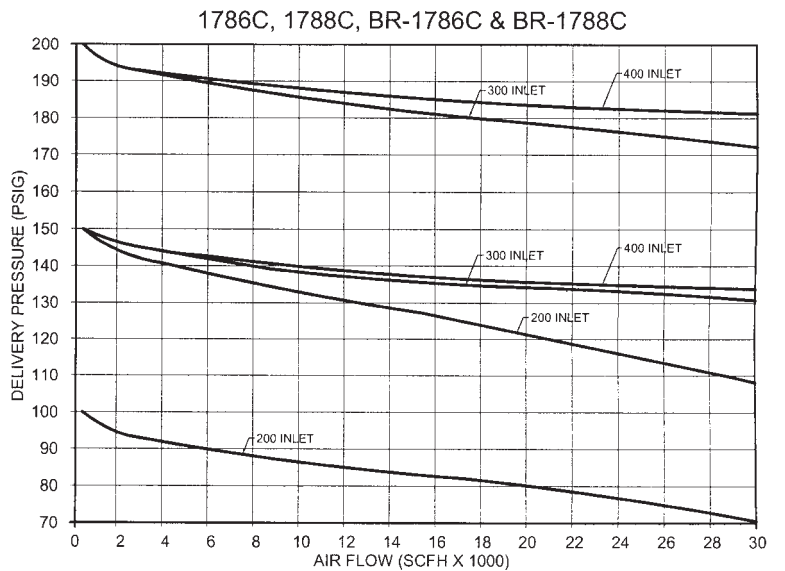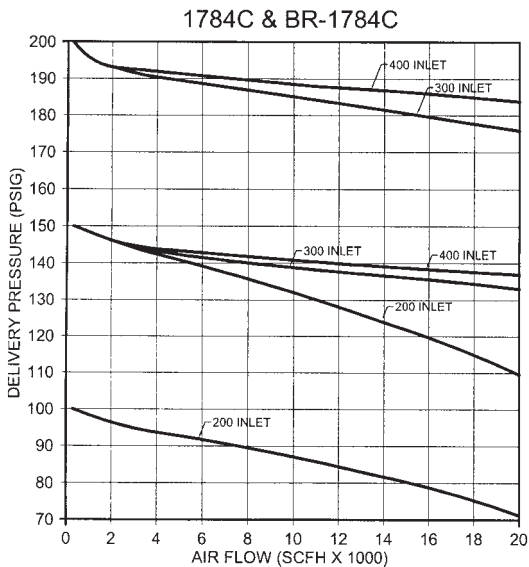

Gas Conversion Table

Service	Multiply Air Capacity By:
Acetylene (15 psi max.)	1.06
Argon	0.85
Carbon Dioxide	0.81

Service	Multiply Air Capacity By:
Fuel Gases	0.86
Helium	2.69
Hydrogen	3.79
Nitrogen	1.02

Service	Multiply Air Capacity By:
Nitrous Oxide	0.81
Oxygen	0.95