

RegO Combination Pressure Build/Economizer Regulator

Application


Combines the function of RG and ECL Pressure Building and Economizer functions in one compact unit. Available in Chart and Harsco piping geometries and a variety of pressure ratings.

Features

- Precision silver brazed assembly
- Repeatable performance and geometry
- 100% factory tested
- Temperature range -320° to +165° F

Materials

Body	Brass
Bonnet	Brass
Seat Disk	Steel
Spring	Steel
Gasket	PTFE

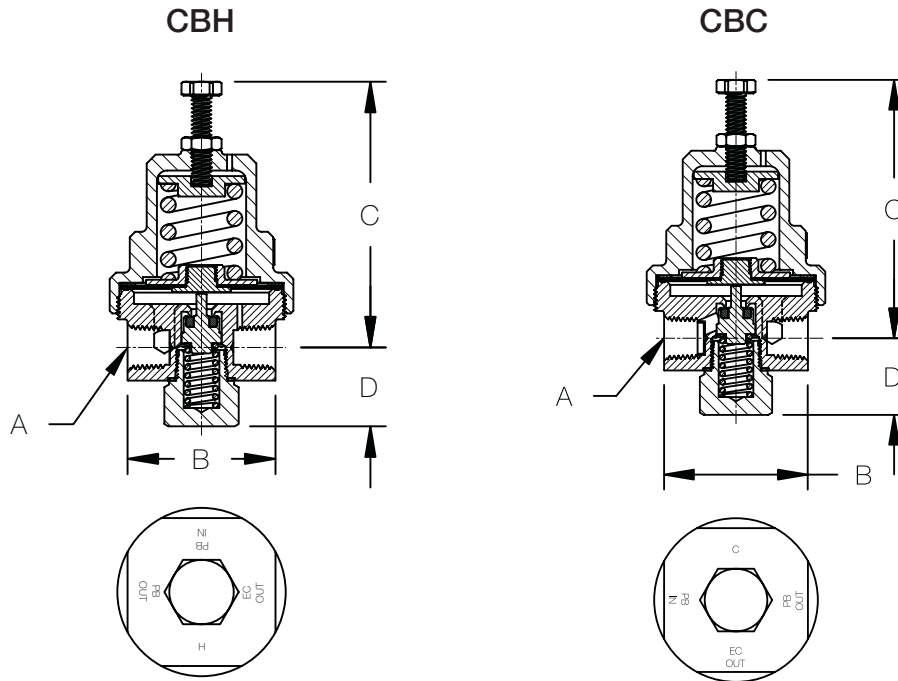

Part Number	Inlet/Outlet Connections (F.NPT)	"A"	"B"	"C"	"D"	Factory Pressure Setting (PSIG)	Operating Range (PSIG)
CBH000125	¼"	¼"	1.182"	3.245"	.966"	125	25-250
CBH000300	¼"	¼"	1.182"	3.245"	.966"	300	150-350
CBH000325	¼"	¼"	1.182"	3.245"	.966"	325	150-350
CBC000125	¼"	¼"	1.182"	3.245"	.966"	125	25-250
CBC000300	¼"	¼"	1.182"	3.245"	.966"	300	150-350
CBC000325	¼"	¼"	1.182"	3.245"	.966"	325	150-350