

RegO Cryogenic Fill Manifold CFM Series

Application


Direct replacement for cryogenic fill modules in bulk vessel applications. Our factory-brazed assembly includes top and bottom fill valves, fill check and hose evacuation valve.

Features

Precision silver brazed assembly
 Repeatable performance and geometry
 100% factory tested
 Temperature range -320° to +165° F

Materials

BodyBronze
 BonnetBrass
 Seat DiskCTFE
 Seat Retainer AssemblyBrass
 Stem and Bonnet Extension TubeStainless Steel
 Packing Spring, WasherStainless Steel
 Jam Ring and Pressure Seal RingsPTFE
 Upper Bonnet and Packing GlandBrass
 HandwheelCoated Malleable Iron
 Tube304L Stainless Steel Tube

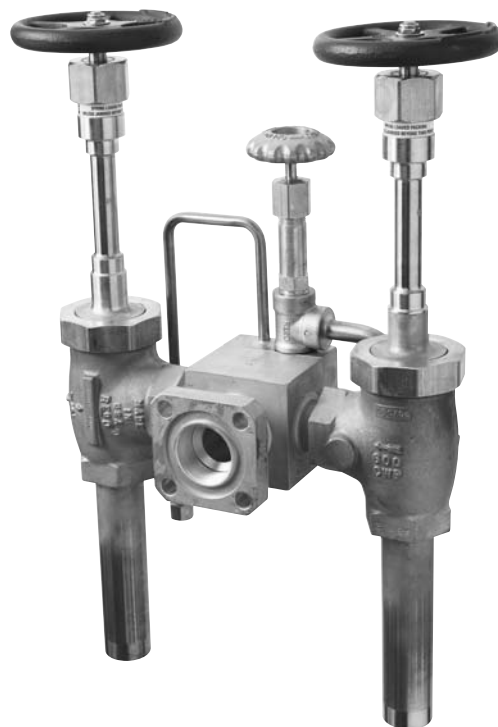

Size and Style

Model	Piping Size
CFM000002D	1"
CFM000004D	1½"

