


Vapor Relief Valves 3139 Series

Application

Designed for use as a relief valve on high pressure regulators to comply with NFPA 58 5.1.1 "High-pressure regulators with a rated capacity of more than 500,000 BTU/hr where permitted to be used on two stage systems shall incorporate an integral relief valve or shall have a separate relief valve."

Features

- Pop-action design keeps product loss to a minimum.
- Suitable for use downstream of 1580 series regulators on vapor systems to comply with NFPA 58 requirements.
- Install a tee downstream from the regulator outlet to insure maximum flow from the relief valve.
- Brass body and seat disc assembly.

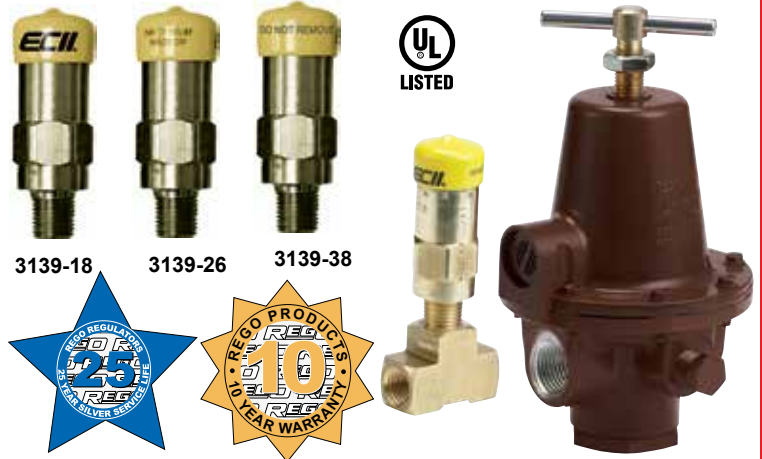

Part Number	Set Pressure	Regulator Settings	Connection Size	Height	Width	Flow Capacity at 120% of Set Pressure (SCFH Propane)	Pipe Away Adapter
3139-18	18 PSIG	10 PSIG	1/4" M. NPT	2 27/32"	1 1/16"	1357*	B-009412-2B
3139-26	26 PSIG	15 PSIG				1725**	
3139-38	38 PSIG	20 PSIG				2304***	

* Flow recorded at 21.6 PSI inlet pressure for this valve. ** Flow recorded at 31.2 PSI inlet pressure for this valve. *** Flow recorded at 45.6 PSI inlet pressure for this valve.

A