

Tank Car Angle Valves for Railroad Tank Cars TA7894P

Application

Designed especially for transfer of LP-Gas and anhydrous ammonia in railroad tank car service.

The combined heavyweight ductile iron castings and precision machining provide ruggedness and superior performance in working pressures up to 400 PSIG.

Features

- "V"-ring spring-loaded pressure seal design provides dependable, leak-free operation. No packing to retighten or replace.
- Wiper o-ring eliminates entrance of dirt and grit into stem area that can prohibit smooth operation.
- Heavy duty ACME stem threads give quick action and are hardened for long service life.
- Swivel seat reduces scoring of seat disc and provides positive shut-off.
- Full diameter seat provides greater flow capacity and low pressure drop.
- Plugged 1/4" NPT boss on downstream side of valve accommodates vent valve or hydrostatic relief valve.
- Equipped with a malleable iron plug and chain installed in the valve outlet.




AAR Approval #E-149515



TA7894P

Materials

Body	Ductile Iron
"V"-Rings	Teflon
O-Ring	Synthetic Rubber
Stem	Stainless Steel
Bonnet	Ductile Iron
Seat Disc	Teflon
Handwheel	Cadmium Plated Ductile Iron

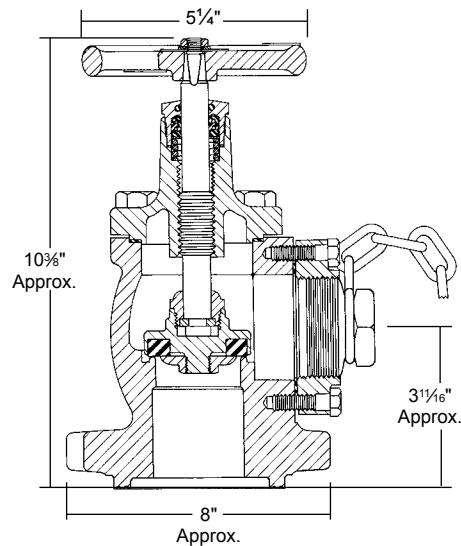

Ordering Information

Part Number	Inlet Connection	Outlet Connection (F.NPT)	Flow At 1 PSIG (Cv) Pressure Drop	Accessories	
				Hydrostatic Relief Valve	Vent Valve
TA7894P	Tank Car Flange	2"	112	SS8001U	TSS3169

* To obtain approximate flow at other than 1 PSIG pressure drop, multiply flow in table by square root of pressure drop. Example: TA7894P @ 9 PSIG = $112 \times \sqrt{9} = 336$ GPM/propane. For NH₃ flow, multiply propane flow by .90.