

THE NETHERLANDS (N E D E R L A N D)





COMMUNICATION

Concerning (1):

- approval granted
- approval extended
- approval refused
- approval withdrawn
- production definitively discontinued

of a type of CNG/LNG component pursuant to Regulation number 110.

Approval number: E4*110R05/00*0404*03

- 1. CNG/LNG component considered:
 - Container(s) or cylinder(s) (1)
 - Tank(s) or vessel(s) (1)
 - CNG accumulator(s) (1)
 - Pressure indicator (1)
 - Pressure relief valve (1)
 - Automatic valve(s) (1)
 - Excess flow valve (1)
 - Gas-tight housing (1)
 - Pressure regulator(s)-(1)
 - Non-return valve(s) or check valve(s) (1)
 - Pressure relief device (PRD)(temperature triggered) (1)
 - Manual valve (1)
 - Flexible fuel lines (1)
 - Filling unit or receptacle (1)
 - Gas injector(s) (1)
 - CNG Compressor (1)
 - Gas flow adjuster (1)
 - Gas/air mixer (1)
 - Electronic control unit (1)
 - Pressure and temperature sensor(s) (1)
 - CNG filter(s) (1)
 - PRD (pressure triggered) (1)
 - Fuel rail (1)
 - Heat exchanger(s)/vaporizer(s)⁽¹⁾
 - Natural gas detector(s) (1)

Type-approval Department



Tel. + 31 79 345 83 02 E-mail typeapproval@rdw.nl www.rdw.nl

- LNG filling receptacle(s) (1)
- LNG pressure control regulator(s)(1)
- LNG pressure and/or temperature sensor(s) (1)
- LNG manual valve(s) (1)
- LNG automatic valve(s)-(1)
- LNG non-return valve(s) (1)
- LNG pressure relief valve(s) (1)
- LNG excess flow valve(s) (1)
- LNG fuel pump(s) (1)

-

2. Trade name or mark : LNG Check Valve NG304 SS series

3. Manufacturer's name and address : Engineered Controls International LLC

100 RegO Drive 27244 Elon, North Carolina United States of America

4. If applicable, name and address of

manufacturer's representative : N.A.

5. Submitted for approval on : 24-08-2015

6. Technical service responsible for

conducting approval tests : Kiwa Nederland B.V.

P.O. Box 137

7300 AC Apeldoorn The Netherlands

7. Date of report issued by that service : 01-02-2023

8. Number of report issued by that service: 150602462_P000277093

9. Approval : granted/refused/extended/withdrawn (1)

10. Reason(s) of extension (if applicable) : The currently homologated LNG Check Valve

NG304 SS series is updated to the latest Revision

of the ECE Regulation 110

11. Place : Zoetermeer

12. Date :14 February 2023

13. Signature :

R.F.R. Clement

14. The documents filed with the application or extension of approval can be obtained upon request.

⁽¹⁾ Strike out what does not apply.

ADDENDUM

1. Additional information concerning the type approval of a type of CNG/LNG components pursuant to Regulation number 110.

1.1.1.2. 1.1.2.	Natural Gas Storage System Container(s) or cylinder(s) (for CNG system) Dimensions Material Tank(s) or vessel(s) (for LNG system) Capacity	stem) :
1.1.2.1.	Material	:
1.1.3.2.	CNG accumulator Dimensions Material Capacity	: :
1.2. 1.2.1. 1.2.2.	Pressure indicator Working pressure(s) (2) Material	:
1.3. 1.3.1. 1.3.2.	Pressure relief valve (discharge valve) Working pressure(s) (2) Material	:
1.4. 1.4.1. 1.4.2.	Automatic valve(s) Working pressure(s) (2) Material	:
1.5. 1.5.1. 1.5.2.	Excess flow valve Working pressure(s) (2) Material	:
1.6. 1.6.1. 1.6.2.	Gas-tight housing Working pressure(s) (2) Material	:
1.7. 1.7.1. 1.7.2.	Pressure regulator(s) Working pressure(s) (2) Material	:
1.8. 1.8.1. 1.8.2.	Non-return valve(s) or check valve(s) Working pressure(s) (2) Material	:
1.9. 1.9.1. 1.9.2.	Pressure relief device (temperature trigg Working pressure(s) (2) Material	ered) :
1.10. 1.10.1. 1.10.2.	Manual valve Working pressure(s) (2) Material	:



	Flexible fuel lines Working pressure(s) (2) Material	:
1.12. 1.12.1. 1.12.2.	Filling unit or receptacle Working pressure(s) (2) Material	:
1.13. 1.13.1. 1.13.2.	Gas injector(s) Working pressure(s) (2) Material	:
	Gas flow adjuster Working pressure(s) (2) Material	:
1.15. 1.15.1. 1.15.2.	Gas/air mixer Working pressure(s) (2) Material	:
1.16. 1.16.1.	Electronic control unit Basic software principles	:
1.17. 1.17.1. 1.17.2.	Pressure and temperature sensor(s) Working pressure(s) (2) Material	:
1.18. 1.18.1. 1.18.2.	CNG filter(s) Working pressure(s) (2) Material	:
	PRD (pressure triggered) Working pressure(s) (2) Material	:
1.20. 1.20.1. 1.20.2.	Fuel rail(s) Working pressure(s) (2) Material	:
1.21. 1.21.1. 1.21.2.	Heat Exchanger(s)/Vaporizer(s) Working pressure(s) (2) Material	:
1.22. 1.22.1. 1.22.2.	Natural gas detector(s) Working pressure(s) (2) Material	:
1.23. 1.23.1. 1.23.2.	LNG filling receptacle(s) Working pressure(s) (2) Material	:
1.24. 1.24.1. 1.24.2.	LNG pressure control regulator(s) Working pressure(s) (2) Material	:



1.25. 1.25.1. 1.25.2.	LNG pressure and/or temperature sensor Working pressure(s) (2) Material	r(s) : :
1.26. 1.26.1. 1.26.2.	LNG manual valve(s) Working pressure(s) (2) Material	: :
1.27. 1.27.1. 1.27.2.	LNG automatic valve(s) Working pressure(s) (2) Material	: :
1.28. 1.28.1. 1.28.2.	LNG non-return valve(s) Working pressure(s) (2) Material	: :
1.29. 1.29.1. 1.29.2.	LNG pressure relief valve(s) Working pressure(s) (2) Material	: :
1.30. 1.30.1. 1.30.2.	LNG excess flow valve(s) Working pressure(s) (2) Material	: 2.1 MPa (300 psi) NG304 SS 6.9 MPa (1000 psi) NG304 brass : See report 150602462 and its extensions
1.31. 1.31.1. 1.31.2.	LNG fuel pump(s) Working pressure(s) (2) Material	: See report 150002402 and its extensions
1.32 1.32.1. 1.32.2.	CNG Compressor Working pressure(s) (2) Material	: :

(2) Specify the tolerance



Report 150602462_P000277093 01-02-2023

Test report

LNG Check Valve NG304 SS series



Applicant

Engineered Controls International, LLC 100 RegO Drive 27244 Elon, North Carolina United States of America Trust Quality Progress



Contents

1	Summary of testing	5
2	Description of the product	6
3	Report history	7
4	Measurement uncertainty	8
5	Appendices	9
6	End of report	12

© 2023, Kiwa Nederland B.V.

This report may only be duplicated as a complete set without any modifications and with permission of the legitimate owner. The test results in this report are exclusively related to the samples offered and tested.

Tests marked in this report with the IRN number are part of the accreditation scope (RvA L248) unless stated differently. Measurement uncertainty of testing in the context of ISO/IEC 17025.

Test reports can, in some cases, contain besides the numeric measured values also the qualification "pass" or "fail". In this assessment, compliance with the specification limit from the applicable product standard is used. The measurement complies with the requirement if the probability of its being within the limit is at least 50%.

This does not take into account the measurement uncertainty associated with the test method.

It is explicitly stated that in the case of a "pass" or "fail", the measured result is corrected for the measurement uncertainty and/or the relevant test conditions for the measured result.

Unless otherwise noted the measurement uncertainty and conditions are as specified in the test specifications. This report is only valid when signed by the test person and reviewer.

- RDW designation number for E4 and e4: RDWT-CAC-04
- KBA designation number for E1 and e1: KBA-P00033-12

Conclusions for compliance with e.g. product standard requirements are not part of the lab scope (RvA L248). In case when information is supplied by the customer it is possible that it can affect the validity of results.

In case of dispute regarding this test report please contact Kiwa Nederland B.V.

Version: 004



TEST REPORT LNG Check Valve NG304 SS series

In accordance with ECE R110

Report number 150602462 Job reference P000277093 Date of issue 01-02-2023

Total number of pages 12 (including appendices)

Testing laboratory KIWA Nederland B.V.

Testing location/address Wilmersdorf 50

7327 AC Apeldoorn

The Netherlands

Applicant's name **Engineered Controls International, LLC**

Address 100 RegO Drive 27244

Elon, North Carolina United States of America

Manufacturers location **Engineered Controls International, LLC**

Address 100 RegO Drive 27244

Elon, North Carolina United States of America

Scope Testing of LNG Check Valve NG304 series regarding the

requirements as derived from

the below mentioned Test specifications.

Test specifications :

Standards Regulation 110 Addendum 109: Regulation No. 110

Revision 6 - Amendment 4

05 series of amendments- Date of entry into force: 22 June 2022

Non-standard test method N.A.

Component description LNG Check Valve NG304 SS series Manufacturer Engineered Controls International, LLC

Trade Mark RegO Products

Model/Type reference LNG Check Valve NG304 SS series

(a full overview can be found in chapter 2: Description of the product)



Sample number(s) : N.A.
Intake date sample(s) : N.A.
Date(s) of testing : N.A.

Remarks : N.A.

Summary: Complies with the requirements as far as identified in the

attached test- and result sheets.

Eric Harmsen

Regina Adelmann

Tested by : Eric Harmsen

(name + signature)

Reviewed by : Regina Adelmann

(name + signature)



1 Summary of testing

On request of Engineered Controls International, LLC the items as mentioned under Test item description are tested according to the Test specifications (see page 3 of this report).

Based on the product(s) information the test plan is not subject to any special interpretations or modifications.

The following modifications are made to the LNG Check Valve NG304 SS series

 The currently homologated LNG Check Valve NG304 SS series is updated to the latest Revision of the ECE Regulation 110

As a result, no tests are carried out

<u>Notes</u>

- The described test results are only valid for the tested materials and objects.
- RDW designation number for E4 and e4: RDWT-CAC-04
- KBA designation number for E1 and e1: KBA-P00033-12



2 Description of the product

The information below is based on the test results on the models under testing and the information of the manufacturer.

LNG Check Valve NG304 SS series

Approval number(s) : E4*110R05/00*0404*03

Marking number(s) : E4-110R-050404 "L"

Manufacturer : Engineered Controls International, LLC

Type(s) : Check valve NG304SS series

NG304SSANG304SSBNG304SSC

Check valve NG304 brass

Working pressure: 2.1 MPa (300 psi) NG304 SS

6.9 MPa (1000 psi) NG304 brass

Classification : Class 5

Temperature range : -162°C up to 85°C

Material(s) : see drawings



3 Report history

 Report number
 : 150602462

 Project number
 : 150602462

Approval number : E4-110R-010404-L

Report date : 24-08-2015
Author : Regina Adelmann
Description : Initial report

LNG Check Valve NG304 SS series

 Report number
 :
 150602462

 Project number
 :
 160301352

Approval number : E4-110R-010404-L

Report date : 02-06-2016
Author : Regina Adelmann
Description : Extension 01

The current homologated LNG check valve NG304 SS series is

extended with the NG304 brass version.

Report number : 150602462

Project number : 160501191

Approval number : E4-110R-020404-L

Report date : 02-05-2017
Author : Henry Rooks
Description : Extension 02

The current homologated LNG check valve NG304SS series is extended

with following types:

NG304SSA NG304SSB NG304SSC

Due to Revision 3 – Amendment 4 of the Regulation ECE R110 the

approval number changed into E4-110R-020404

.

Report number : 150602462
Project number : P000277093

Approval number : E4*110R05/00*0404*03 Marking number : E4-110R-050404 "L"

Report date : 01-02-2023
Author : Eric Harmsen
Description : Extension 03

The following modifications are included:

The currently homologated LNG Check Valve NG304 SS series is

Job reference: 150602462_P000277093

updated to the latest Revision of the ECE Regulation 110.



4 Measurement uncertainty

Measurement uncertainty of testing in the context of ISO/IEC 17025

Applied equipment

The applied equipment in the department Automotive are in the calibration database ICS2000, in this database the equipment of the department is stated with the applicable measurement uncertainty. This database is controlled by the calibration department.

Applied measurement uncertainty

In the laboratory the OM 3.10.7 applies.

Unless otherwise specified in the test specifications the measurement uncertainty and conditions applied are:

Voltage	± 2 % Reading
High voltage test device (SPS) 500 – 3750 Vac	± 5 % Reading
Resistance	± 2 % Reading
Protective wire and insulation test device	± 5 % Reading
Sliding gauge	± 0.1 mm
Measuring tape	± 1 mm
Cooling and heating < -10 °C	± 5 °C
Cooling and heating -10 °C / +100 °C	± 3 °C
Cooling and heating > 100 °C	± 5 % Reading
Climate chamber	± 2 °C / ± 3 %RV
Ambient temperature	± 1 °C (10-30)
Time =< 1 hour	± 0.2 s
Time > 1 hour	± 0.1 % Reading
Torque	± 5 % Reading
Bending moment	± 5 % Reading
Standard weight	± 5 % Reading
Weighing < 30 g	± 0.1 % Reading
Weighing > 30 g	± 2 % Reading
Pressure (gas + air) general	± 5 % Reading
Barometer reading	± 5 mbar
Pressure (water)	± 5 % Reading
Burst water pressure	± 1 % Reading
Gas tightness 0-100 cm ³ /h	± 5 cm ³ /h
Gas tightness > 100 cm3/h	± 5 % Reading
Actual Flow rate (general)	± 5 % Reading




5 Appendices


Appendix 1 – Drawings	1(
11.	



Appendix 1 – Drawings

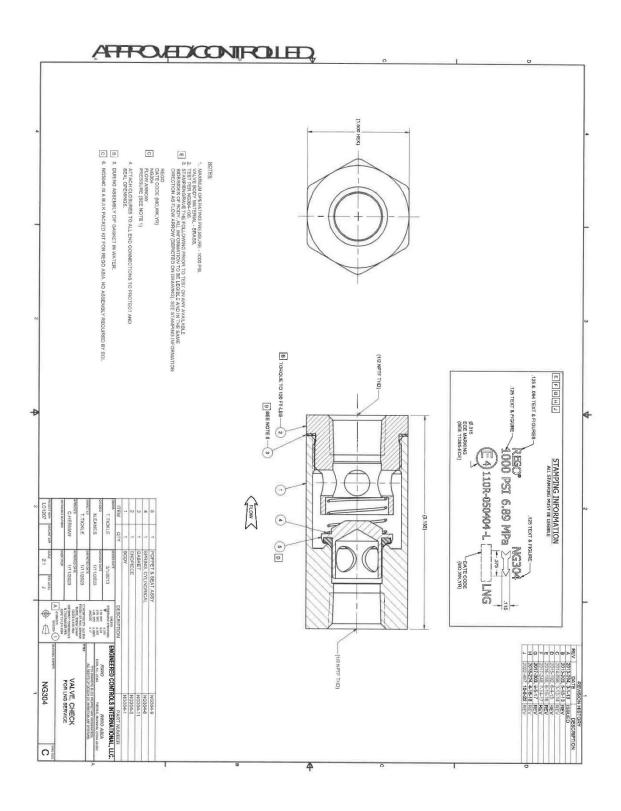



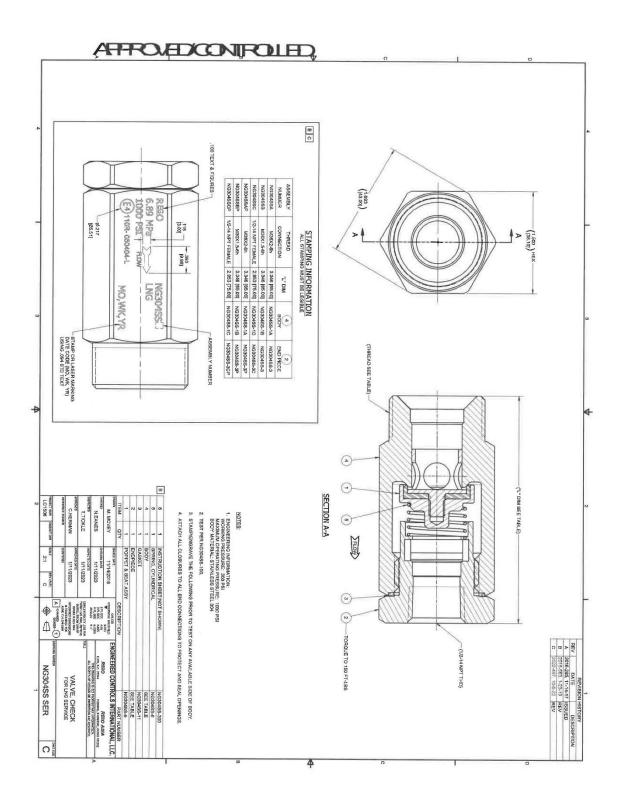



6 End of report