

# Low Emission Unloading Adapter A7568LE

## Application

Designed for use in conjunction with our 6588LE and 6589LE low emission filler valves installed on bobtails and transports. Valve is designed to unload through the 6588LE and 6589LE filler valves. stem position is controlled by the hand-wheel with a durable ACME thread for maximum travel with minimal rotation. Stem will open upper check of filler valve and allow flow out of the tank

## Features




- V-ring spring loaded pressure stem seal provides for leak-proof operation. No packing to retighten or replace.
- Circular bridge in globe design and a dropped seat in the angle design achieve greater flow with less pressure drop.
- Heavy duty rolled ACME stem threads provide quick action and long service life.
- Cap and plug provided for safe storage when not in use
- Durable RegO adapters on inlet and outlet.

## Materials

Body ..... Ductile Iron  
 Stem ..... Stainless Steel  
 3/4" M.ACME X 2" M.NPT Adapter ..... Stainless Steel  
 Body ..... Brass  
 Screen ..... Stainless Steel  
 Gasket ..... Resilient Rubber



**A7568LE**

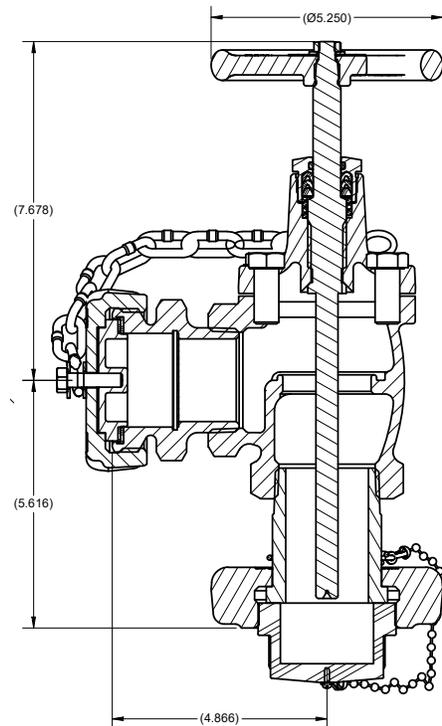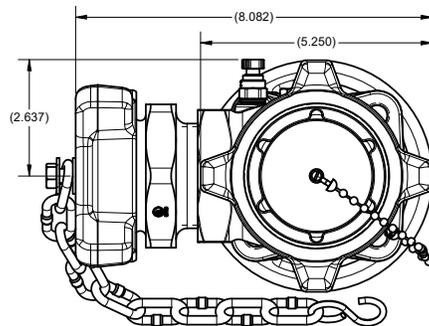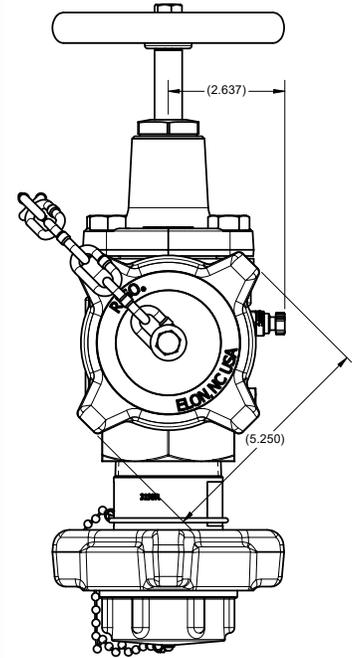

## Ordering Information

Part Number	Inlet	Outlet	Cap and Plug for Both Ends
A7568LE	3/4" F. ACME	3/4" M. ACME	Yes