

REGO[®]

& Presto-Tap Make Leak Testing a Snap!


Step 1

Remove Gas Tight Cap from pressure fitting




Step 2

Attach 300 LB Gauge to pressure fitting.
Perform System Leak Test Per NFPA 58
- Your Company Policy

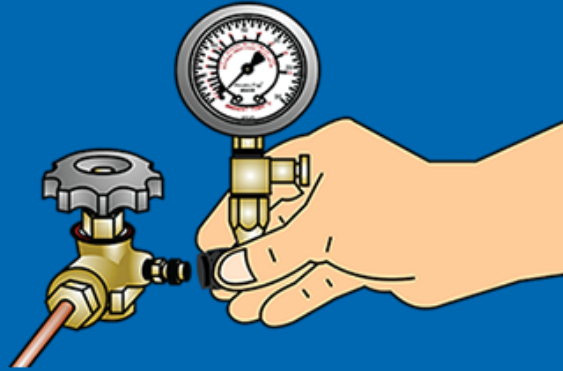

Step 3

Once the system has been leak tested successfully simply remove the 300 LB gauge and replace and snug the Gas Tight Cap.

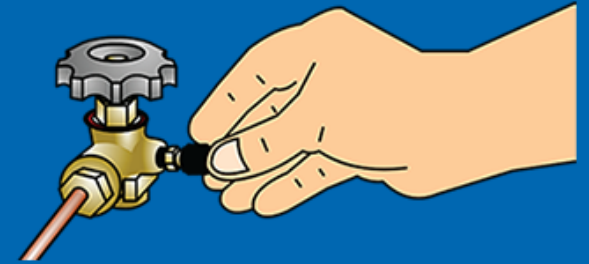

- **Saves time and money**
- **Pays for its self after the first use**
- **Eliminates the need to break the system to perform a leak test**
- **Reduces fugitive emissions up to 90%**

