Double Check Vapor Equalizing Valves for ASME and DOT Containers 7573 Series and 3183AC

Application

Designed to facilitate loading operations by providing equalization of pressures in the supply and storage containers. The supplementary excess flow valve closes when the flow from the container being filled exceeds a predetermined rate.


The 7573 Series is designed for use in bulk delivery systems and motor fuel containers. The 3183AC is designed for use in delivery trucks and other large containers.

Features

- Double check provides added system protection.
- Specify RegO Vapor Equalizing Valves on all your original tank purchases to ensure quality and dependable performance.

Materials

Body	
Spring	Stainless Steel
Upper Check Seat + ACME	
Body Gasket	Copper
Cap	Plastic

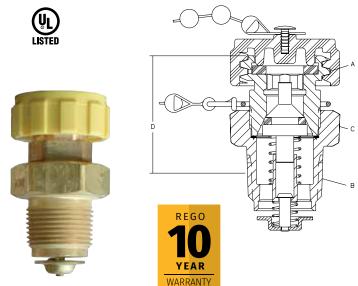

7573 Series

Ordering Information

Part Number		A. B.	C.	D.	Approx. Closing Flow at	
Basic	W/ Chain & Cap	ACME Hose Connection	Tank Connection M. NPT	Wrench Hex Flats	Effective Length (Approx.)	100 PSIG Inlet Pressure (SCFH/Propane)
7573D	7573DC	11⁄4"	3/,"	1%"	1 ¹⁵ / ₃₂ "	4,100
-	3183AC	1¾"	11⁄4"	2"	229/32"	10,000