

# Presto-Tap® LDS2000/RV Fitting

## Application

The patented, UL Listed Presto-Tap® LDS2000/RV is designed to obtain pressure readings and perform leak test without breaking into the system by utilizing the proper Presto-Tap® gauge for the selected testing location. Legal installed at any point in the system.

## Features

- Brass 1/8" MNPT X 1/4" Flare Housing with #54 Orifice and Everseal
- Valve Core with Viton Seat
- UV Resistant Cap with Nitrile "O" Ring
- UL Label

## Materials

Valve Body..... Brass  
 Core..... Stainless Steel w/Nylon Seal & Viton seat  
 Cap..... UV Resistant Plastic w/Nitril "O" Ring  
 Label..... UV resistant Plastic w/Marking



**LDS2000RV**

## Ordering Information - Tank Pressure Application (UL Listed)

Part Number	Thread	Core	Body Wrench Flat	Cap Material	#54 Orifice	Application
LDS2000RV	1/8" M. NPT	Viton	7/16"	UV Resistant Plastic	YES	Tank Pressure

# Presto-Tap® RVL & PT-AF14 Fitting

## Application

The RVL & PT-AF14 is designed to obtain pressure readings and perform leak test without breaking into the system by utilizing the proper Presto-Tap® gauge installed at the regulator gauge port location.



**RVL**

## Ordering Information - Low Pressure Application (Non UL Listed)

Part Number	Thread	Core	Body Wrench Flat	Cap Material	#54 Orifice	Application
RVL	1/8" M. NPT	Viton	7/16"	Brass	NO	Regulator Installation
PT-AF14	1/4" M. NPT					

# Patented Tank Pressure Fitting TPF Series


## Application

Low cost, permanently installed fitting between tank service valve and first stage regulator providing leak test capability without the use of tools. Eliminates the need to discard pigtail to access tank pressure.



## Features

- Easily installed with an adapter such as male POL x 1/4" F.NPT and 1/4" female POL x 1/4" M.NPT

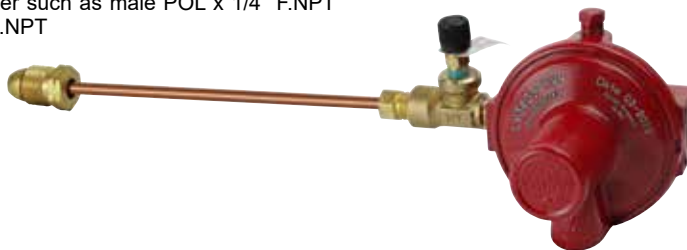

**TPF**

## Ordering Information

Tank Pressure Fitting			
Part Number	Inlet	Outlet	Reduces Emissions
TPF	1/4" F. NPT	1/4" M. NPT	Up to 90%